

MEET OUR PORTABLE WHEELCHAIR LIFT

You are having a large event, or even a small one, and not one person can be left behind - especially because their wheelchair offers no dignified way to get to their seat. It's a no brainer. We are finding more and more that our event production planners want to make sure this accessory is on their event site, and we are proud to offer the state of the art wheelchair lifts for both indoor and outdoor events across the country.


Our chair lifts are easily set up, affordable, and show your client that you thought of everything. Best of all, they are quiet and safe. You can see under them to ensure no one is in jeopardy. We are so proud to offer them to you.

Ask any of our sales people for pricing and availability.

The Portable Trus-T-Lift system is on high grade casters that make it easy to move from one location to the next.

These high grade casters have a foot activated locking position to prevent the lift from moving once you have it into position. This unit's low cost and ease of installation make it ideal for commercial applications.

Another key benefit is that the portable units are exempt from the ASME 18.1 standards

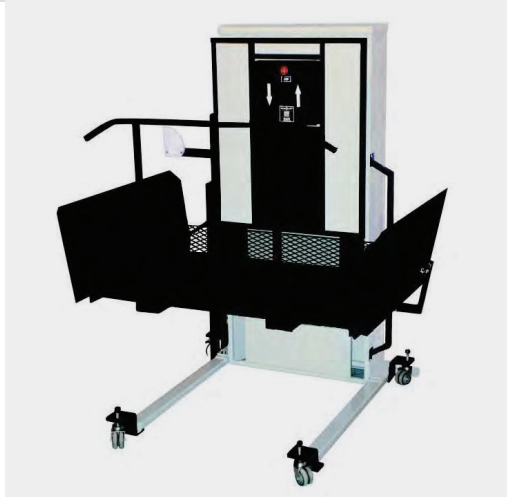

making them a very economical way to offer wheelchair access to heights up to 52”.

The portable vertical platform lift has a maximum lifting height of 52” and can lift up to 550 lbs.

The Portable Trus-T-Lift system is an institutional quality wheelchair lift.

Expanded metal construction makes the lift easy to move and allows the operator to see under the lift, making operation even safer.

Suitable for indoor use.

Portable Wheelchair Lifts Standard Features

- Smooth and quiet performance
- 550 lbs (250 kg) Lift Capacity
- 52” lifting height
- 8 feet/minute lift speed
- High grade casters with foot activated locking position to keep lift in place
- Constant pressure Soft Touch control pads for ease of operation
- Grated metal platform with full under platform visibility
- Non-skid surface
- 18” extra wide positive action reversible toe plate for universal access
- Quick and easy set up and adjustment
- Straight through access, lower access right
- Direct worm gear/Acme screw-nut drive for maintenance free operation (much lower maintenance than belted or hydraulic systems)
- Extreme weather resistant design
- Zero load start for cold weather climates (drive system allows motor to get up to full speed before lifting).
- All mechanics are fully enclosed, yet easy to access through the rear or front of the housing unit.
- Attractively finished in a durable off-white baked on finish.
- Non load bearing backup safety nut on lift shaft
- Fuse box accessible from carriage
- Keyed emergency stop and manual operation
- UL and CSA certified

Minimum 23” clearance height required. (Alternately, for lower heights, the toe plate can be removed)

Maintenance

Maintenance of the vertical platform lift unit shall consist of regular cleaning of the unit, protection of the painted surface of the unit.

Warranty

All parts are warranted against manufacture's defect for a one year period from the date of purchase. Parts are FOB Factory and shall not include labour costs required to replace the defective part(s).

Accepted as Shown
 Revise and Resubmit
 Accepted as Modified
 Date: _____
 Per: _____

NOTES:
 - Dimensions are in inches

SPECIFICATIONS:
 - 34" x 54" LIFT PLATFORM
 - 54" x 54" FOOTPRINT
 - 72" HEIGHT
 - 23" - 52" LIFT RANGE
 - MAXIMUM LOAD 550 lbs [250 kg]
 - 8 FEET/MINUTE [2.4 METRES/MINUTE] LIFT SPEED
 - SCREW NUT WORM GEAR DRIVE
 - MOTOR: 1/2 H.P. 110V A.C.
 - POWER SUPPLY: 110V/1PH/60HZ
 - C/W 15A FUSED DISCONNECT
 - NON-LOAD BEARING BACKUP SAFETY NUT ON LIFT SHAFT
 - SAFETY HANDSAL ON CARRIAGE
 - ZERO-LOAD START IN BOTTOM POSITION

